

## Automatic Aerial Triangulation Software Of Z/I Imaging

**CHRISTOPH DÖRSTEL, Oberkochen**  
**LIANG TANG, Munich**  
**MOSTAFA MADANI, Huntsville**

### ABSTRACT

Results of the OEEPE-ISPRS test on performance of automatic tie point extraction in the existing Automatic Aerial Triangulation (AAT) have shown limitations as well as potential for improvements in today's AAT solutions. Z/I Imaging as a photogrammetry system provider, has decided to improve its existing, well known PHODIS AT product by integrating it into the Windows NT based ImageStation platform and in the meantime to enhance its functionality to address the limitations of the existing AAT solution. This paper introduces some of the main features of the newly developed ImageStation Automatic Aerial Triangulation (ISAT) product. The new technology AAT system is shown as an expanded system to improve the conventional AAT approach to handle GPS/INS data in an optimized way as well as to overcome current drawbacks in tie point determination.

### 1. INTRODUCTION

Photogrammetry is still undergoing a phase of change. The challenge consists not only in the all-round transition to digital photogrammetry, but also in the transition to second-generation digital photogrammetric Workstation (DPWS) as an end to end, workflow oriented solution, which is currently under way. This process will mainly be characterized by short innovation cycles based e.g. on internet applications and by new requirements from customers who may like to enter into new markets. Different data sources such as GIS databases or various sensor data must jointly be processed in the future (Dörstel, 1999).

AAT has earned itself a place within the DPWS chain. The former operating principle which has the primary function of controlling the measuring process does only play a secondary role in the future. The demand for fast data validation, self-checking mechanisms and a block-wide, end product-oriented approach does have a considerable impact on the importance of AAT. The next generation of DPWS will be characterized by the addition of further data sources such as GPS/INS measurements and the output of improved high quality orientation data.

As summarized by Tang (Tang, 1999) a new AAT approach must incorporate methods for efficient blunder detection and elimination, increase the number of multi-ray points, ensure an even point distribution, include techniques to process poorly textured areas, and provide users with an intuitive and instructive interface for handling cases of automation failure.

Innovative technologies like GPS/INS are more and more challenging the business of aerial triangulation, and thus compete with the next generation of AAT systems (Cramer, 1999). Although the determination of the exterior orientation parameters by the GPS/INS systems has been improved significantly, the accuracy of these parameters is still not good enough for standard photogrammetric applications. Therefore, the integration of self calibrating block adjustment (Ebner 1976) to compensate for systematic image errors based on available tie points and a combined block adjustment computing for shift and drift parameters must be implemented.

This paper concentrates on some main aspects of generating high-quality exterior orientation data within the new ImageStation Automatic Aerial Triangulation System (ISAT) only. A more comprehensive description on the complete workflow of ISAT is given by Madani ( Madani et al., 2001).

## 2. NEW IMAGESTATION AERIAL TRIANGULATION

The principle of the PHODIS digital AAT procedure is to generate a dense cloud of tie points well distributed over the entire block only. An external Bundle Block Adjustment program (BBA) is then called to detect and eliminate blunders in the measurements and finally determine image exterior orientation parameters. This working strategy was based on the fact that BBA programs have been used in the photogrammetric practice since long and it is not necessary to convince customers to give up their working habit. However, it requires advance techniques of blunder detection inside the BBA programs. On the other hand, it is hard to get the entire system performance optimized.

To work based on very roughly known input data of exterior orientation is another significant feature of the PHODIS AT system, which has been proven to be advantageous for many years. With the increasing GPS/INS application for imaging flights today, an optimum integration of high-quality exterior orientation data delivered by GPS/INS systems, such as the POS Z/I 510 system, needs to be implemented in the new AAT system. In this case, a complete AAT is not necessary, since only few points are sufficient for system calibration and quality control of direct measured EO parameters. Here, the user expects that the automatic procedure can make use of the high-quality orientation input to reduce the processing time to a very limit.

Considering this, it is obvious that a fundamental change in the implemented AAT approach needs to take place. In the new ISAT solution the following main features were added:

- high quality tie points by integrated free net adjustment
- detection of geometrically weak areas
- optimized processing in case of precise EO
- Computation of exterior orientation (EO) shift and drift parameters during BBA.

### High Quality tie points

To generate a set of high quality tie points out of the extracted point measurements a robust free net adjustment is introduced. The bundle block adjustment takes place at intermediate pyramid levels, each time after extracting tie points. As results, blunders are eliminated from the measurements on one hand, improved EO parameters of each image are obtained and can be used late to track down identified features more precisely on the other.

Based on the tie points, a-priori project wide standard deviation, given EO parameters and corresponding standard deviations, the least squares adjustment is started. Residuals of the observations are forwarded to the implemented weighting function, and new weights are computed and assigned to the observations for the next iteration. If the weight of an observation is smaller than a predefined threshold, the corresponding photo point can be marked as a blunder. The task of a weighting function is to generate large weights for good observations (small residuals) and small weights for bad observations (large residuals). ISAT uses the Danish Method (Kubik et al., 1987) for robust estimation. Alternatively, the well known Stuttgart method can be used. The robust

adjustment is internally repeated until no more points can be removed, or a predefined threshold is reached.

After finishing BBA at the intermediate level, a consistent and reliable set of image coordinates is available. This set of image coordinates is essential for the weak area detection.

### Detection of geometrically weak areas

One of the major tasks of the embedded BBA is to detect the geometrically weak areas over a photogrammetric block to manage the internal matching strategy and to tag those areas for human interaction.

in order to tag geometrically weak areas the image area is subdivided into a regular 3x3 grid (see figure 1). Each grid mesh represents a von Gruber area, where the availability of tie points is a prerequisite for a stable geometric block connection. Detected tie points in each of those grid meshes can now be investigated by several criteria. As a pre-knowledge an expected overlapping level for each mesh can be defined.

The criteria to evaluate weak areas are :

- The tie point quality derived from the point residual provided by BBA
- The number of multi-ray points in the grid mesh.

If points in a mesh are not able to deliver a sufficiently accurate solution for the final BBA the mesh area is tagged as a weak area.

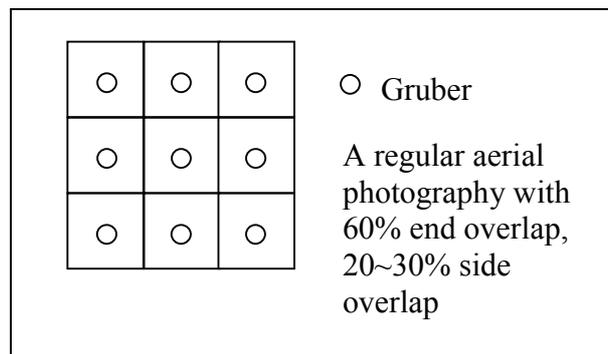


Figure 1: 3x3 regular grid

Weak area information is passed to the matching kernel to control point extraction. The paramount goal of this processing step is to close as many weak areas as possible by automatically searching for tie points in multiply overlapping areas. Hereby points with high connectivity are preferred.

This processing part is one of the most important steps to output a tie point list which has well distributed, highly connected points without blunders.

As the automatically generated point list may contain weak areas, especially in poor textured image parts ImageStation offers a semi-automatic procedure to measure points in those areas. This function guides the user to the detected weak areas, opens all involved images and offers semi-automatic point measurement functions to insert tie points into weak areas.

### Optimized processing in case of precise EO

Having just roughly known EO parameters available the AAT approach starts with a block formation based on feature-based matching (FBM) and automatic relative orientation at the start level (see figure 2), and runs through the intermediate level to generate a primary point list. This step serves to connect the whole image block and to deliver relative EO parameters for each image. In case of available GPS/INS EO, because of the good geometric determinability, the block formation step must not be performed. In this case the tie point list can be generated forming the block directly at the intermediate pyramid level.

As a consequence matching can be started directly from the intermediate level and focused on multiply overlapping areas which can be defined precisely.

Based on the precise EO the forward intersection can deliver the most reliable check on blunders in the tie point list and thus guarantees a high quality of the remaining points. Furthermore, based on the good quality of tie points, the point tracking based on least squares matching (LSM) can work faster than that in the general case because well-qualified input points improve the success rate of the matching as well.

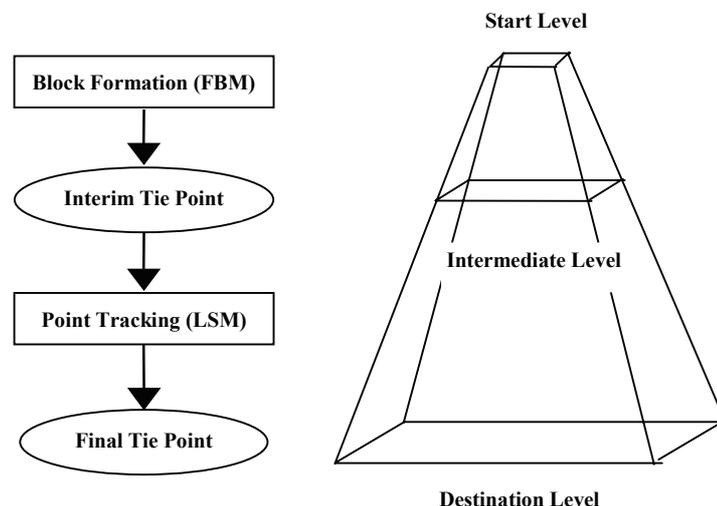
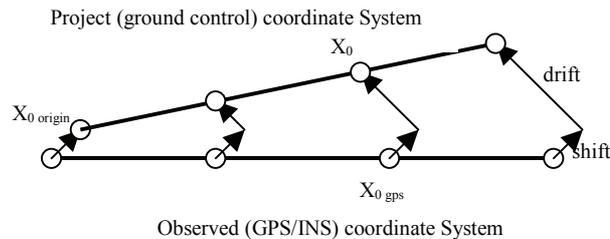


Figure 2: Structure of AAT

### Computation of EO shift and drift parameters during BBA

The exterior orientation shift and drift corrections are applied to the 3 camera positions as well as to the 3 orientation angles. At a maximum, per strip 12 additional parameters (as free unknowns) are estimated during the bundle block adjustment. Then they are applied to the EO parameters (see figure 3). These parameters are normally used during aerial triangulation process only. For subsequent applications, the corrected EO parameters in the final Project Coordinate System ( $X_0$ ,  $Y_0$ ,  $Z_0$ ,  $\omega_0$ ,  $\varphi_0$  and  $\kappa_0$ ) are exported.

The weights for the given exterior orientation parameters are either derived from the GPS/INS post processing software or are estimated by the user. If no observations for the parameters are provided, the approximate values will be zero. If some photos do not have GPS and/or INS information, their EO parameters will be estimated during BBA.



**Figure 3: EO corrected by shift and drift parameter**

### 3. CONCLUSIONS

The introduced ImageStation Aerial Triangulation package replaces the former MATCH AT based triangulation package. The ISAT product delivers fully automatically determined homogenous, well-distributed and best-matched multi-ray tie points. This is achieved by a built-in robust bundle block adjustment during all phases of the image matching operation. The embedded robust bundle block adjustment is performed in a sense of free net adjustment. The bundle block adjustment is improved to optionally compute sensor self calibration as well as shift and drift parameters. ISAT is provided with improved search algorithms to find sufficient and well-distributed tie points in the overlapping regions. An efficient blunder detection and a well-thought weak area handling serve for an optimized workflow. Input of EO information delivered by GPS/INS sensors is used to reduce the processing time and allows ISAT to be used as an efficient validation tool as well.

In future releases of this product, the AAT module will be expanded to be able to process multi-channel frame imagery such as Z/I Imaging Digital Modular Camera (DMC).

### 4. REFERENCES

- Cramer M. (1999): Direct Geocoding – Is Aerial Triangulation Obsolete? Photogrammetric Week '99, Fritsch D., Spiller R. (Eds.), Heidelberg, 59-70.
- Dörstel C. (1999): Perspectives for aerial triangulation offered by Z/I Imaging. Photogrammetric Week '99, Fritsch D., Spiller R. (Eds.), Heidelberg, 205-210.
- Ebner H. (1976): Self Calibrating Block Adjustment. *Bildmessung und Luftbildwesen* 44, 128-139.
- Kubik, K., Merchant D., Schenk T. (1987): Robust Estimation in Photogrammetry. *Photogrammetric Engineering and Remote Sensing* (53) 2, 167-169.
- Madani, M., Dörstel, C., Zeitler, W., Tang, L. (2001): Z/I Imaging New Automatic Aerial Triangulation System. ASPRS 2001, St. Louis, USA, Mai 21-24, 2001.
- Tang, L. (1999): Bemerkungen zur automatischen Aerotriangulation. Festschrift fuer Prof. Dr.-Ing. Heinrich Ebner zum 60. Geburtstag, (Eds. Heipke/Mayer), Technical University Munich, 321-323.